


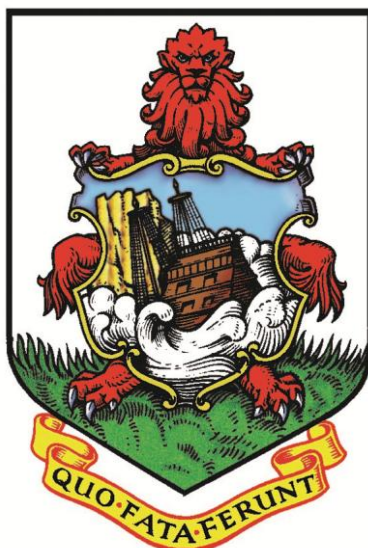

Ministry of Public Works And Environment

Department of Works and Engineering

Drainage Improvements to Wellington Slip Road, St. Georges

Annex C – Scope of Works

Request for Quotations No.: **2026-011Q-MPW**

The expedition of the works is to include the following per the enclosed drawings, details, and specifications:

1. Mobilization.
2. Supply and install necessary barricades and/or traffic control devices.
3. Saw cut existing asphalt
4. Excavation works.
5. Construct reinforced concrete slab on grade.
6. Construct reinforced masonry walls, concrete filled (3,000 psi concrete).
7. Construct reinforced concrete suspended slab.
8. Supply and install access hatches and ladder rungs. (Catch basin structures to be supplied by MPW and installed by Contractor).
9. Drill and install borehole.
10. Backfilling and compaction.
11. Asphalt works.
12. Site clean-up and restoration.
13. Demobilization.
14. Any other works as detailed on the plans.

The Contractor will be required to supply all materials and labour required to complete the above mentioned construction works inclusive of all duties and landing costs. Upon substantial completion of the works, the Contractor will be required to expedite a detailed site inspection with the Owner or Owner's representative to facilitate final 'sign-off' on the works.

No changes to the Contract shall be made without fully signed approvals by the MPW Project Manager. Any work undertaken without such signed approvals for changes shall be deemed ex gratia.

The Contractor shall supply and install any necessary traffic control devices during construction works.